

# THERMADATA® WIFI LOGGER FOR HUMIDITY



- Simultaneously displays humidity & temperature
- Records up to a maximum of 18000 readings
- LED display of high & low alarm status
- No ongoing or subscription charges

These new ThermaData WiFi humidity loggers measure and record both temperature and relative humidity (%rh) over the range of 0 to 50 °C and 0 to 100 %rh. At programmable intervals, the loggers will record simultaneously both temperature and humidity, recording up to a maximum of 18000 readings (9000 humidity and 9000 temperature).

The logger incorporates a large LCD that displays temperature and humidity from the internal sensors. Each ThermaData WiFi humidity logger incorporates two LED's, a flashing green LED indicates that the logger is active/logging and a flashing red LED indicates that your customised preset alarms have been exceeded.

The humidity and temperature ThermaData WiFi loggers are suitable for a diverse range of applications which include HVAC climate monitoring, QA monitoring of storage areas etc.



## THERMADATA STUDIO SOFTWARE

Both powerful and sophisticated, yet user-friendly, the ThermaData Studio software enables temperature and humidity data to be organised and analysed to provide management information.


The ThermaData Studio software has the ability to display up to 32 traces on a graph, the trace colours are user selectable. All files can be viewed as thumbnail icons for easy identification.

The software allows the user to programme the logging sample/interval rate (0.1 to 330 minutes), communication interval (sync) with PC, real-time clock, °C or °F and a manual start option. It is also possible to include a user ID for each logger.



Order code	Description
298-621	ThermaData WiFi HTD
830-880	Protective silicone boot - black
830-800	Magnetic mount
890-111	UKAS 3-point certificate available

## HOW DOES THE THERMADATA WIFI HTD LOGGER WORK?

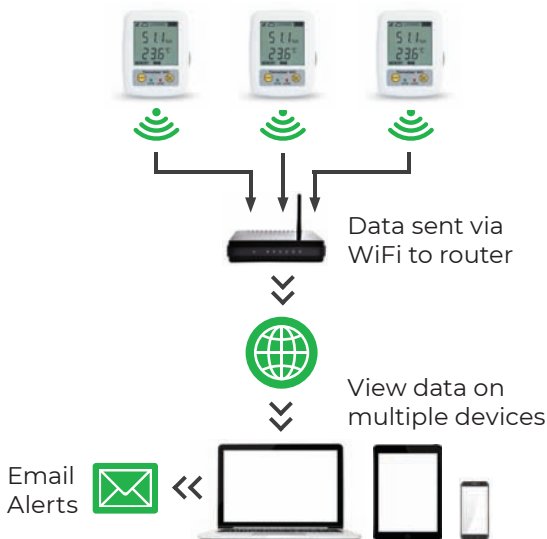

Specification	Temperature	Humidity
Range	0 to 50 °C	0 to 100 %rh
Resolution	0.1 °C/°F	0.1 %rh
Accuracy	±0.5 °C (0 to 50 °C)	±2 %rh @ 25 °C (20 to 80 %rh) ±3 %rh @ 25 °C (10 to 90 %rh) ±4 %rh @ 25 °C (0 to 100 %rh)
Hysteresis	N/A	±1 %rh
Sensor type	Thermistor	Capacitance polymer
Memory	2 x 9000 readings	
Sample rate	0.1 to 330 minutes	
Battery & life	2 x 1.5 volt AA - approx. 10 months @ 20 °C	
Display	12 mm LCD/2 LED's	
Dimensions	29 x 72.5 x 96 mm	
Weight	165 grams	

Optional UKAS Certificate of Calibration